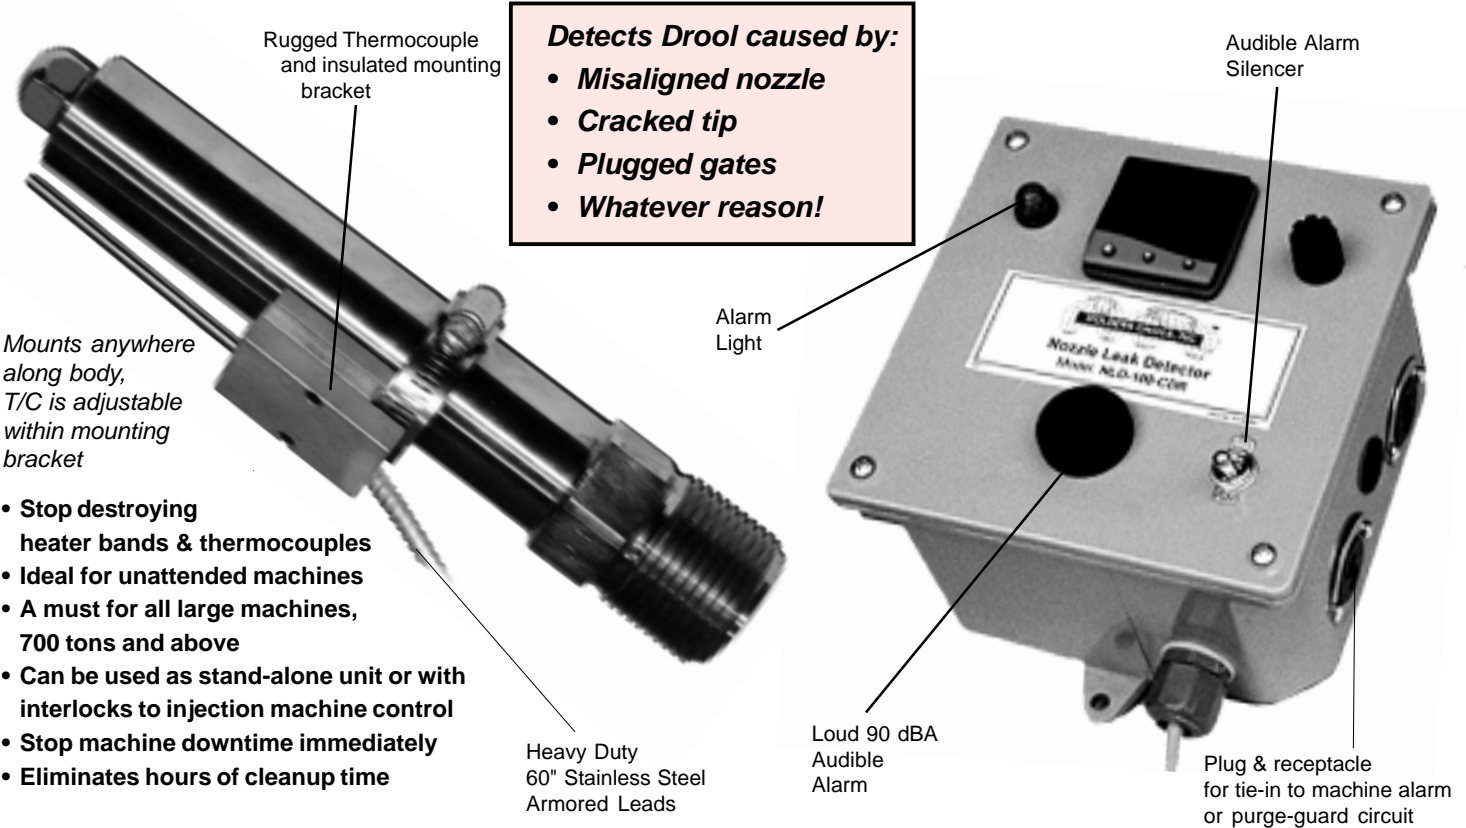


# NOZZLE LEAK DETECTOR







**How it works:**

The thermocouple assembly mounts easily on your nozzle using a simple clamp (can be mounted directly on top of a heater band or on the nozzle body of an internally heated nozzle). The thermocouple plugs into a convenient receptacle at the side of control box. Set control approximately 100 to 150°F below nozzle zone temperature. If leaking plastic comes in contact with the thermocouple, the audible alarm will sound and the alarm light will illuminate.

**Premium Model NLD100-CDR** with relay and convenient receptacles for input and output. Can be interfaced to your machine control-panel alarm circuit or wired directly to the purge guard circuit to stop injection immediately.

**TO ORDER:** Advise Control Box and Thermocouple Required

<b>Premium</b>	<b>NLD100-CDR</b>	Control Box with Alarm & Relay for Machine Interface	<b>\$425.00</b>
<b>Recommended Thermocouples with Mounting Brackets</b>			
	<b>NLT290-MB</b>	2" x 90 Degree - Thermocouple w/insulated mounting bracket for short nozzles: 5", 6" or 7" long. Has 60" stainless steel armored leads	<b>\$86.00</b>
	<b>NLT3-MB</b>	3" Straight Thermocouple w/insulated mounting bracket for medium nozzles: 6", 7" or 8" long. Has 60" stainless steel armored leads	<b>\$86.00</b>
	<b>NLT6-MB</b>	6" Straight Thermocouple w/insulated mounting bracket for long nozzles: 8", 9" or 10" long. Has 60" stainless steel armored leads	<b>\$91.00</b>
	<b>NLT9-MB</b>	9" Straight Thermocouple w/insulated mounting bracket for extra long nozzles: 12" & longer. Has 60" stainless steel armored leads	<b>\$94.00</b>

©2014 MOLDERS CHOICE, Inc.



24 Hour Service - 7 Days a week

## 1-800-809-4623

WebSite: [www.molderschoice.com](http://www.molderschoice.com) • Email: [olders@molderschoice.com](mailto:olders@molderschoice.com)