


HIGH TEMP PTFE HOTFLEX™ HOSE

Be Safe - Always use Hotflex™ Hose for temperatures up to 450° F

- Chemical resistant
- Flex & shock resistant
- Non-contaminating
- High flow rate
- Lightweight
- Resists deterioration
- Long life
- Non-adhesive
- High burst pressures

Hotflex™ Smooth-Bore Hose is constructed of an extruded innercore of virgin PTFE with type-304 stainless steel braid reinforcement. The innercore is non-aging, and has long flex life. Its non-stick surface makes cleaning easy. The braid acts both as a pressure carrier and a protective covering.

Sizes: 5/32" I.D. to 1-1/8" I.D. (Stocked in 1/4" to 3/4")
Temperature range: -65° F to +450° F (-54° C to +230° C)
MEETS SAE REQUIREMENTS FOR 100R14

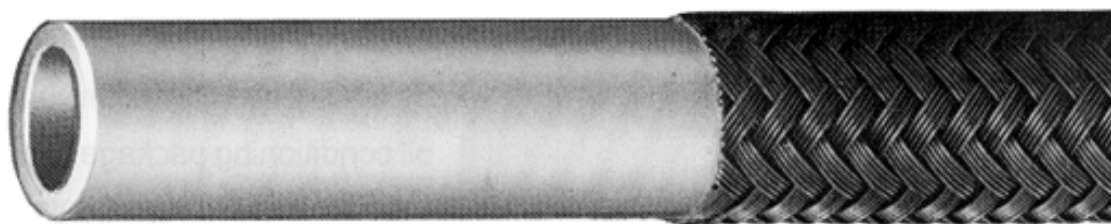

PRICES - (Includes swaged-on male fittings both ends)

Thread Size NPT	Hose I.D.	4' Length		6' Length		8' Length		10' Length	
		Part #	PRICE	Part #	PRICE	Part #	PRICE	Part #	PRICE
1/4"	3/16"	THH144	\$17.00	THH146	\$21.00	THH148	\$27.00	THH1410	\$36.00
3/8"	5/16"	THH384	\$26.00	THH386	\$34.00	THH388	\$38.00	THH3810	\$44.00
1/2"	13/32"	THH124	\$31.00	THH126	\$37.00	THH128	\$45.00	THH1210	\$53.00
3/4"	5/8"	THH344	\$55.00	THH346	\$65.00	THH348	\$85.00	THH348	\$95.00

(Other sizes made to order - **CALL 1-800-809-4623** for quote)

OPTIONAL FITTINGS FOR HOTFLEX™ HOSE



Swivels Male-to-Female

NPT	Part #	PRICE
1/4"	MS250	\$2.00
3/8"	MS375	\$2.25
1/2"	MS500	\$3.70
3/4"	MS750	\$4.70



Swivels Female-to-Female

NPT	Part #	PRICE
1/4"	FS250	\$2.00
3/8"	FS375	\$2.20
1/2"	FS500	\$3.00
3/4"	FS750	\$4.00



Yellow Zinc Steel Plug w/Shut-off (Viton seal)

NPT	Part #	PRICE
1/4"	H2F2-V	\$6.50
3/8"	H3F3-V	\$8.50
1/2"	H4F4-V	\$9.50
3/4"	H6F6-V	\$16.50



Yellow Zinc Steel Socket w/Shut-off (Viton seal)

NPT	Part #	PRICE
1/4"	2HF2-V	\$11.00
3/8"	3HF3-V	\$17.00
1/2"	4HF4-V	\$17.50
3/4"	6HF6-V	\$26.00

© 2009 MOLDERS CHOICE, Inc.



24 Hour Service - 7 Days a week

1-800-809-4623

WebSite: www.molderschoice.com • Email: molders@molderschoice.com